GUIDED TYPE FALL ARRESTOR ON FLEXIBLE ANCHORAGE WITH AN ENERGY ABSORBER

TECHNICAL SHEET

Réf. 71353, 71354

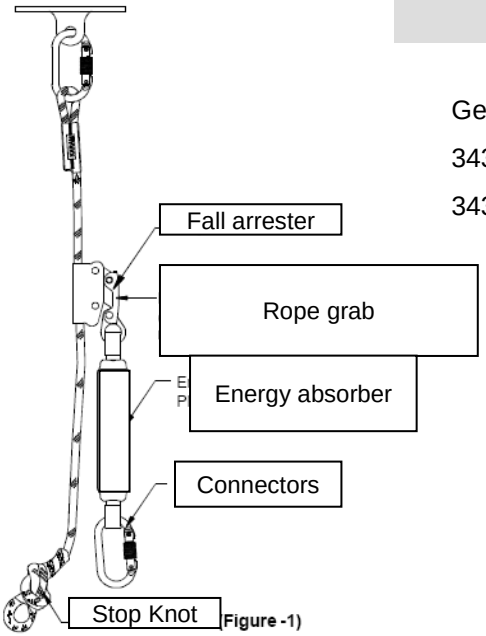

(Figure -1)

Gencode :

3435241 713537

3435241 713544

Ref.	Rope lengtgh	Weigth
71353	10 metres	1300 g (+/- 10g)
71354	20 metres	2800g (+/- 10g)

GENERAL DESCRIPTION AND MATERIALS

- **Guided type fall arrestor with braided rope+ energy absorbe**
- **cannot be open**
- **Hitched on the rope**
- **Rope diameter 12 mm**
- **Static strength > 15KN**
- **1 connector 71110**
- **Braided rope with stopknot**
- **1 loop covered with polyethylene protective sleeve+ 1 black plastic-coated** loop on the energy absorber
- **Minimum 6m free space from anchorage point**

SPECIFICAL ADVANTAGES

- **1 connector**
- **Strength**
- **1 energy absorber**

MAIN APPLICATION FIELDS

- Job in **high places in combination with a work positioning system**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors **in accordance with EN 362.**
- **Construction and civil engineering**
- **Fall arrestor moves along with the user climbing up or down and locks him in case of a fall**

PACKAGING

- **Individual packing**
- **Carton of 10 fall arrestors with 10m rope**
- **Carton of 5 fall arretsors with 20m ropes**

STANDARDIZATION

This fall arrestor is in conformity with the model of individual safety equipment which correspond to

EN 353-2:2002 **The CE Type-examination certificate 4017 Issue 1 Extension 1**

CE

Delivered by **SATRA (notified body n° 0321)**

SACLA – Z.I. de Rosarge – 01700 LES ECHETS – MIRIBEL – FRANCE

Tèl. : (33) 04 72 26 57 57 – Fax. : (33) 04 72 26 51 70 – Mail : contact@sacla-tm.fr